


### 12G-SDI to HDMI Converter

LYNX | Centraal™

yelloGUI



Shown with Fiber SFP Option Installed

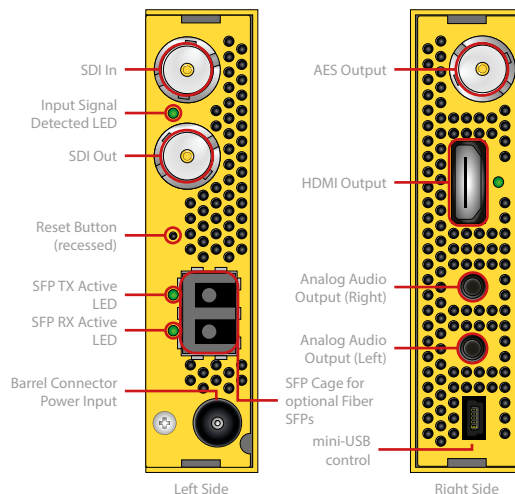

### Features

- Supports video inputs from 1.5G-SDI up to 12G-SDI
- Supports HDR and WCG indication at HDMI output
- Automated detection of input signal color range via VPID information
- 3G-SDI Level A and Level B support
- Automatic input standard and format detection
- 1x Optional SFP Fiber input and output
- HDMI video output with embedded audio
- Analog and AES audio outputs
- Selectable timecode burn-in and Metadata burn-in
- CEA 708 Closed caption burn-in
- 16 channel on screen audio level meter
- H/V delay & H flip and safe area markers
- yelloGUI compatible: Gain access to additional features

### Description

The CDH 1411 is a versatile, compact 12G-SDI to HDMI converter designed to assist a host of monitoring and display applications in broadcast, post production and pro AV markets. Convert any SDI video signal to HDMI for monitoring and display. Fiber connectivity options add SDI fiber transmission and/or SDI fiber reception using the integrated fiber SFP socket.

Two channels of audio can be de-embedded providing digital AES and analog audio outputs. Analog audio outputs have selectable full scale range presets. The two selected audio channels can also be embedded into the HDMI output. Alternatively 8 channels selected from the input signal (8 audio groups in 64 channels) can be embedded into the HDMI output. Various burn in features make the CDH 1411 a true monitoring tool. Individually selectable timecode burn-in, Closed Caption burn-in, 16 channel audio metering, safe area markers and Metadata display are just a few of the on-screen monitoring features. The yelloGUI software provides support for a host of additional settings and features which are accessed using a PC and the USB port on the module.

### Technical Specifications

<b>Supported Formats</b>	4K 4096x2160p 23.98, 24, 25, 29.97, 30, 47.95, 48, 50, 59.94, 60
	UHD 3840x2160p 23.98, 24, 25, 29.97, 30, 50, 59.94, 60
	2K 1920x1080p 23.98, 24, 25, 29.97, 30, 47.95, 48, 50, 59.94, 60
	HD 1920x1080p 23.98, 24, 25, 29.97, 30, 50, 59.94, 60
	HD 1920x1080PsF 23.98, 24, 25, 29.97, 30
	HD 1920x1080i 50, 59.94, 60
	HD 1280x720p 23.98, 24, 25, 29.97, 30, 50, 59.94, 60
<b>Supported Standards</b>	SMPTE 259M, SMPTE 292M, SMPTE 424M, SMPTE 2081-1, SMPTE 2082-1
<b>Color Precision</b>	YCbCr 4:2:0 8, 10-bit (HDMI only)
	YCbCr 4:2:2 10-bit
	YCbCr/RGB 4:4:4 10, 12-bit (SDI)
	YCbCr/RGB 4:4:4 8-bit (HDMI)
<b>SDI I/O</b>	1x 12G-SDI input on 75 Ohm BNC connectors
	1x 12G-SDI output on 75 Ohm BNC connectors
	3G-SDI Level A & B-DL & B-DS according to SMPTE ST 425-1
	Multirate reclocking: 1.5Gbit/s - 3Gbit/s - 6Gbit/s - 12Gbit/s
<b>Automatic Cable EQ**</b>	1.5Gbit/s 3Gbit/s 12Gbit/s
	190m 150m 85m
	Belden 1694A Belden 4794R
<b>Fiber I/O</b>	1x fiber input, 1x fiber output
	Duplex (singlemode) using LC/PC connection
	SMPTE 297M - 2006
<b>HDMI Output</b>	HDMI 2.0b Type A connector
	2 or 8 channel audio embedding (selectable)
<b>AES Output</b>	AES3-id on 75 Ohm BNC, 2 channels (selectable)
<b>Audio Output</b>	Left and right analog audio using 3.5mm jack sockets
	Balanced mode with 24, 22, 20, 18, 15, 12dBu, Line Level Pro (4dBu) and Line User
	Unbalanced mode with Line Level Cons (-10 dBV)
<b>Power</b>	+12V DC @ 3.7W nominal - (supports 10 - 24V DC input range)
<b>Physical</b>	Size 140mm x 90mm x 22mm (incl. connectors) (5.51" x 3.54" x 0.86")
	Weight: 230g (8.11oz)
<b>Ambient</b>	5 - 40°C (41 - 104°F) 90% Humidity (non condensing)
<b>Model #</b>	CDH 1411 4250479327436
<b>Includes</b>	Module, AC power supply, HDMI + USB cable

### Monitoring Features

The CDH 1411 is ideal for regular transparent image monitoring, providing a clean 1:1 HDMI conversion of the SDI input signal. There are also a number of other HDMI monitoring options available. These

monitoring modes are activated using the module dip switch and can be used individually or as combined monitoring modes.

#### Clean Feed

- Direct conversion of input SDI Stream
- HDMI output is the same as the SDI input resolution and frame rate (CDH 1411 does not scale)
- Colorspace, Colometry, Color Range, and Bit-Depth for HDMI output can be set via yelloGUI
- Manual EOTF settings available.



#### Burn in Windows

- Select and display two timecode values (VITC, LTC)
- SDI input format with frame rate
- Up to 16 audio level meters
- VITC, LTC, Closed Caption and AFD metadata presence indicator
- Display Closed Captions



#### Safe Area Markers

- Multiple different Safe Area markers available (default: SMPTE Safe Action 90/90)
- Center cross marker
- Aspect Ratio Marker and safe from Aspect Ratio Marker
- Curtain Transparency Settings (30-100%)
- Eight Marker Colors
- Settings available via yelloGUI



#### H/V Delay & H Flip


- View horizontal and vertical blanking
- Flip on horizontal axis





### Fiber Application Using CDH 1411 SDI to HDMI Converter

Sample application using two CDH 1411 modules for SDI fiber optic transmission up to 10km (6.2 miles) @12Gbit/s with integrated HDMI signal confidence monitoring at each end.

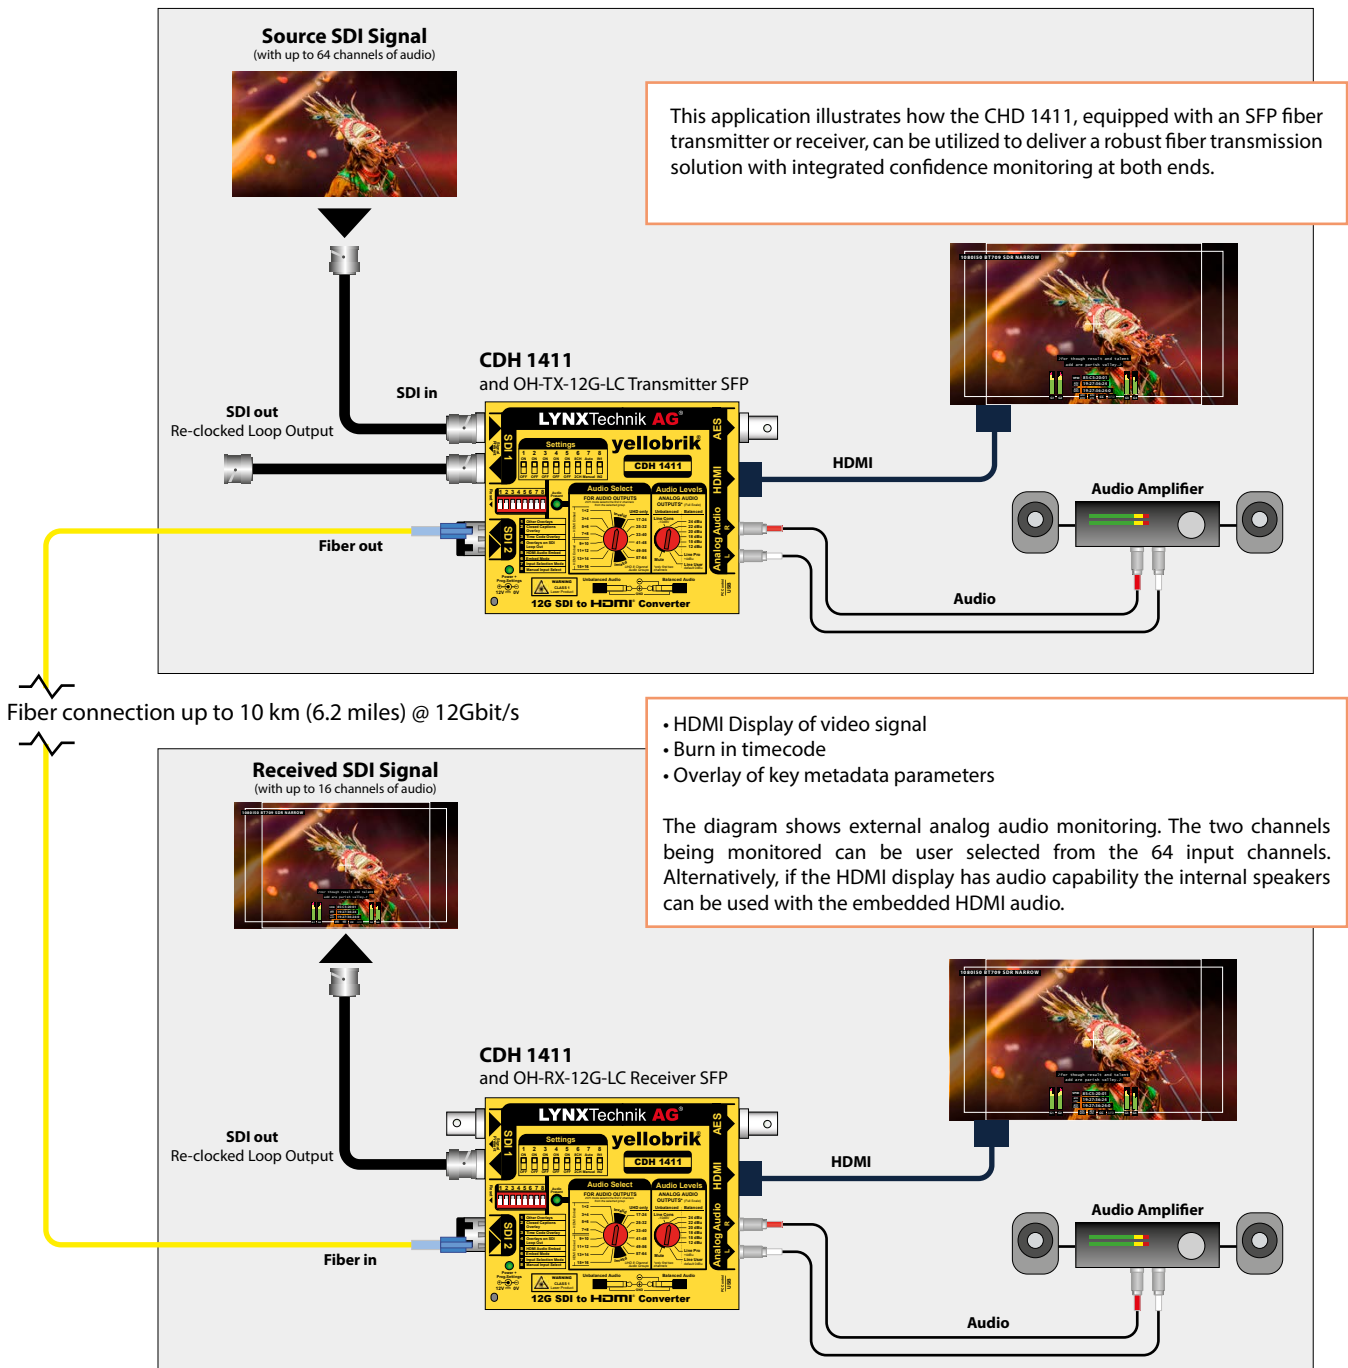



### Optional Accessories

#### Rack Frames

This yellobrik can be placed in a rack frame along others to build increasingly complex systems, all monitored and controlled with a rack controller (RCT 1012) and server module (SRV 1000) via a PC or MAC using LynxCentraal.

The RFR 1200 offers additional power redundancy with GPI alert. It automatically closes a connection between the A and B terminals on power failure.

The RPS A100 is a 100W power supply, which can be mounted at the rear end of the RFR 1200 with an RXT 1001 power supply holder for rack frames.



**RFR 1200:** yellobrik Rack Frame



**RPS A100:** 100W Power supply




**RXT 1001:** Power Supply Holder

#### Fiber Adapter Cables


While some of our products offer LC, ST and SC fiber connectors, most SFPs in our product range offer LC fiber connectors.

To still allow the necessary flexibility in a professional setting we offer patch cables to convert LC to ST or SC fiber connections. These patch cables' insertion loss and return loss are manually checked for each individual cable to allow for maximum precision when calculating the optical budget.


Besides the selection here we offer LC/FC and LC/LC patch cables.

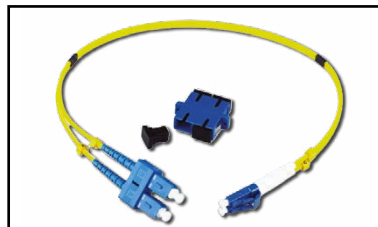


**LC/SC Dup:** LC/SC Duplex adapter cable

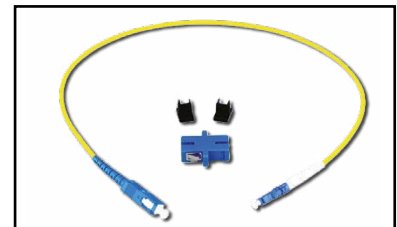

**LC/SC Sim:** LC/SC Simplex adapter cable

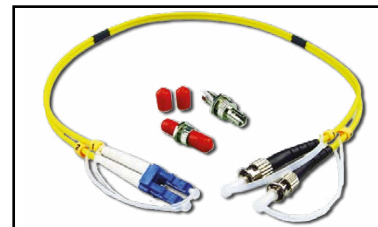

**LC/ST Dup:** LC/ST Duplex adapter cable

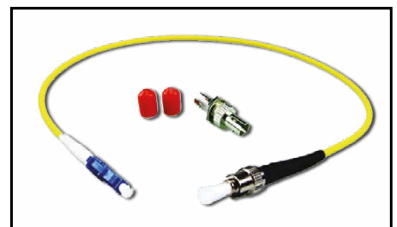

**LC/ST Sim:** LC/ST Simplex adapter cable

#### Fiber I/O Options:

A wide range of SFP modules are available for this yellobrik. The selection listed here shows the most likely SFP modules for most typical setups.

More SFP modules are available. To find the perfect solution for your setup visit [lynx-technik.com](http://lynx-technik.com) for more information or contact us.

Model	Description	Power	
SDI Fiber Transmitter Options			
OH-TX-12G-LC/ST	12G SFP Fiber TX - Singlemode - LC or ST conn. - 10km	-5.. +0.5dBm	
SDI CWDM Fiber Transmitter Options			
OH-TX-12G-XXXX-LC XXXX=Wavelength	CWDM SFP Fiber TX - Singlemode LC Conn. - 10km* 18 wavelengths acc. ITU T G692.2 [ 1270nm - 1610nm ]	-2.. +3dBm	
Model	Description	Sensitivity	
SDI Fiber Receiver Options			
OH-RX-12G-LC/ST	12G SFP Fiber RX - Singlemode - LC or ST connector	-16...-10dBm	
Model	Description	Power	Sense
SDI Fiber Transceiver Options			
OH-TR-12G-LC	SFP Fiber RX/TX - Singlemode, LC Connector - 10km	-5...+0.5 dBm	-10dBm
SDI CWDM Fiber Transceiver Options			
OH-TR-12G-XXXX-LC XXXX=Wavelength	CWDM SFP Fiber RX/TX - Singlemode LC Conn. - 10km* 18 wavelengths acc. ITU T G692.2 [ 1270nm - 1610nm ]	-2.. +3dBm	-14 ... -10dBm